


Xerox® VersaLink® Multifunction Printer

B7025/B7030/B7035

VersaLink B7000 Series Multifunction Printers are built on Xerox® ConnectKey® Technology. For more information, go to www.connectkey.com.

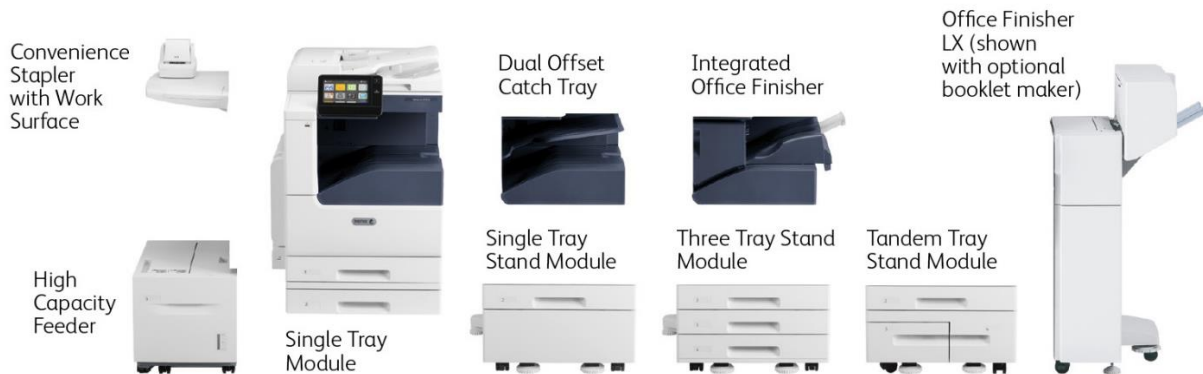

System Specifications	VersaLink B7025	VersaLink B7030	VersaLink B7035
One-Sided Speed 8.5 x 11 in. / A4 / 210 x 297 mm 8.5 x 14 in. / 216 x 356 mm 11 x 17 in. / A3 / 297 x 420 mm	Up to 25 ppm (pages per minute) long edge feed (LEF) Up to 16 ppm 8.5 x 14 in. / 216 x 356 mm Up to 14 ppm 11 x 17 in. / A3 / 297 x 420 mm	Up to 30 ppm (LEF) Up to 20 ppm 8.5 x 14 in. / 216 x 356 mm Up to 17 ppm 11 x 17 in. / A3 / 297 x 420 mm	Up to 35 ppm (LEF) Up to 22 ppm 8.5 x 14 in. / 216 x 356 mm Up to 19 ppm 11 x 17 in. / A3 / 297 x 420 mm
Monthly Duty Cycle¹	Up to 107,000 pages / month ¹	Up to 129,000 pages / month ¹	Up to 153,000 pages / month ¹
Recommended Average Monthly Print Volume²	Up to 13,000 pages	Up to 15,000 pages	Up to 17,000 pages
Hard Drive	320 GB HDD (Optional on Desktop Model)		
Processor	1.05 GHz Dual-Core		
Memory	2 GB		
Connectivity	Ethernet 10/100/1000 Base-T, High-speed USB 3.0, Wi-Fi 802.11n and Wi-Fi Direct with optional Wi-Fi Kit (concurrent wired and wireless connections supported), NFC Tap-to-Pair		
Controller Features	Unified Address Book, Configuration Cloning, Scan Preview, Xerox Extensible Interface Platform®, Xerox App Gallery, Xerox® Standard Accounting, Role Based Permissions, Convenience Authentication Enabled, Online Support		
Device Specifications			
Electrical Requirements			
North America	Voltage : 110-127V -10% / +6 % Frequency: 50/60 Hz +/-3 %, 12A		
Europe	Voltage : 220-240V +/- 10 % Frequency: 50 Hz +/-3 %, 8A		
Power Consumption			
Printing ⁴	For 110V: 25 ppm = 1.1 kWh; 30 ppm = 1.5 kWh; 35 ppm = 1.7 kWh For 220V: 25 ppm = 1.1 kWh; 30 ppm = 1.5 kWh; 35 ppm = 1.8 kWh		
Standby Mode ⁴	110V: 83 Watts or less; For 220V: 86 Watts or less		
Sleep Mode ⁴	110V: 1.2 watts or less, 220V: 1.4 watts or less		

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

Operating Environment				
Required Temperature Range (Storage)	32° to 95° F (0° to 35° C)			
Required Temperature Range (Operating)	50 to 90° F (10 to 32° C)			
Required Relative Humidity	10% to 85%			
Sound Power Levels	Printing: 6.75 B(A) or less • 25 ppm = 6.54 B(A); 30 ppm = 6.70 B(A); 35 ppm = 6.75 B(A) Standby: 4.10 B(A) or less • 25 ppm = 4.10 B(A); 30 ppm = 4.10 B(A); 35 ppm = 4.10 B(A) Full System (including finisher and HCF) Printing: 25 ppm = 7.22 B(A); 30 ppm = 7.37 B(A); 35 ppm = 7.46 B(A) Standby: 25 ppm = 6.54 B(A); 30 ppm = 6.70 B(A); 35 ppm = 6.75 B(A)			
Sound Pressure Levels	Printing: 50.0 dB(A) • 25 ppm = 49.4 dB(A); 30 ppm = 49.7 dB(A); 35 ppm = 50.0 dB(A) Standby: 16.4 dB(A) • 25 ppm = 16.4 dB(A); 30 ppm = 16.4 dB(A); 35 ppm = 16.0 dB(A) Full System (including finisher and HCF) Printing: 25 ppm = 53.4 dB(A); 30 ppm = 53.6 dB(A); 35 ppm = 54.0 dB(A) Standby: 25 ppm = 16.0 dB(A); 30 ppm = 16.0 dB(A); 35 ppm = 15.7 dB(A)			
Boot Time (from Off to UI Ready)	As fast as 98 seconds			
Warm-up Time (from Sleep to UI Ready)	As fast as 12 seconds			
Dimensions and Weight (Unpackaged)	Width	Depth	Height	Weight
Base Unit	23.23 in. / 590 mm	26.41 in. / 670.8 mm	30.23 in. / 767.9 mm	113.1 lbs. / 51.3 kg
Base Unit with Single Tray with Stand Module	24.24 in. / 615.7 mm	26.41 in. / 670.8 mm	44.04 in. / 1118.6 mm	168.21 lbs. / 75.8 kg
Base Unit with High Capacity Tandem Tray Unit	24.24 in. / 615.7 mm	26.41 in. / 670.8 mm	44.04 in. / 1118.6 mm	193.35 lbs. / 87.2 kg
With Office Finisher LX (with Booklet Maker)	47.0 in. / 1194.0 mm	26.8 in. / 681.8 mm	44.04 in. / 1118.6 mm	249.12 lbs. / 113.0 kg
Certifications				
	To view the latest list of certifications, go to www.xerox.com/OfficeCertifications .			
Paper Handling				
Document Feeder				
Capacity ³	Duplex Automatic Document Feeder (DADF): 110 sheets			
Sizes	Custom sizes: Duplex: 4.92 x 4.33 in. to 11.69 x 17 in. / 125 x 110 mm to 297 x 431.8 mm; Simplex: 4.92 x 3.35 in. to 11.69 x 17 in. / 125 x 85 mm to 297 x 431.8 mm			
Weights	Simplex: 11 lb. bond to 34 lb. bond / 38 to 128 gsm Duplex: 13 lb. bond to 34 lb. bond / 50 to 128 gsm			
Bypass Tray				
Capacity ³	100 sheets			
Sizes	Custom sizes: 3.5 x 3.87 in. to 11.69 x 17 in. / 88.9 x 98.4 mm to 297 x 431.8 mm			
Weights	16 lb. bond to 80 lb. cover / 60 to 216 gsm			
Types	Bond Plain Paper Cardstock Custom Envelopes Hole Punched			

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

	Labels Heavyweight Labels Letterhead Lightweight Cardstock Pre-Printed Recycled
Tray 1	
Capacity³	520 sheets
Sizes	Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm
Weights	16 lb. bond to 95 lb. cover / 60 to 256 gsm
Types	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled
Choose 1 of 4 Additional Paper Handling Options:	
Option 1 – Single Tray (Tray 2) (Does not include Stand)	
Capacity³	520 sheets
Sizes	Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm
Weights	16 lb. bond to 95 lb. cover / 60 to 256 gsm
Types	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled
Option 2 – Single Tray (Tray 2) with Stand	
Capacity³	520 sheets
Sizes	Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm
Weights	16 lb. bond to 95 lb. cover / 60 to 256 gsm
Types	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

Option 3 – Three Tray Stand Module	
Capacity ³	Tray 2: 520 sheets Tray 3: 520 sheets Tray 4: 520 sheets
Sizes	Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm
Weights	16 lb. bond to 95 lb. cover / 60 to 256 gsm
Types	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled
Option 4 – High Capacity Tandem Tray Stand Module	
Capacity ³	Tray 2: 520 sheets Tray 3: 870 sheets Tray 4: 1,130 sheets
Sizes	Tray 2: Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm Tray 3: Standard Sizes: 8.5 x 11 in. and 7.25 x 10.5 in. / A4 or B5 Tray 4: Standard Sizes: 8.5 x 11 in. and 7.25 x 10.5 in. / A4 or B5
Weights	16 lb. bond to 95 lb. cover / 60 to 256 gsm
Types	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled
Envelope Tray – Replaces Tray 1 (Optional)	
Capacity ³	Up to 60 envelopes
Sizes	#10 commercial, Monarch, DL, C5 Custom sizes: 3.9 x 5.8 in. to 6.4 x 9.5 in. / 98 x 148 mm to 162 x 241 mm
Weights	20 lb. bond to 25 lb. bond / 75 to 90 gsm
High Capacity Feeder (Optional) (Requires 1 of the above paper handling options 2, 3 or 4)	
Capacity ³	2,000 sheets
Sizes	Standard Sizes: 8.5 x 11 in. and 7.25 x 10.5 in. / A4 or B5
Weights	16 lb. bond to 80 lb. cover / 60 to 216 gsm
Total Capacity	
Base Unit Capacity ³	620 sheets
Single Tray Module Capacity ³	1,140 sheets
Single Tray Module with Stand Capacity ³	1,140 sheets
Three Tray Module Capacity ³	2,180 sheets

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

High-Capacity Tandem Tray Capacity³	3,140 sheets		
Finishing			
Centre Output Trays			
Centre Output Tray (Standard)	500 sheets offset		
Dual Catch Trays³ (Optional)	250 sheets each; Lower tray offsets		
Integrated Office Finisher (Optional)			
Stacking Tray	500 sheets of 20 lb. bond / 80 gsm – 8.5 x 11 in. / A4 or 250 sheets of 20 lb. bond / 80 gsm – 11 x 17 in. / A3		
Sizes	3.5 x 3.9 in. to 11.7 x 17 in. / 89 x 98 mm to 297 x 432 mm		
Weights	16 lb. bond to 80 lb. cover / 60 to 220 gsm		
Stapling	Single Auto stapling: 50 sheets maximum: Letter / A4 / B5-size sheets (less than 90 gsm or (2) 220 gsm covers) 30 sheets maximum: Legal / Tabloid / A3 / B4-size sheets (less than 90 gsm or (2) 220 gsm covers)		
Office Finisher LX (Optional) (Requires 1 of the above paper handling options 2, 3 or 4)			
Capacity³	Stacking Tray: 2,000 sheets unstapled or 1,000 sheets single stapled or 750 sheets dual stapled (8.5 x 11 in. / A4) (dual stapling only with optional booklet maker)		
Sizes	8.3 x 7.2 in. to 11.7 x 17 in. / 210 x 182 mm to 297 x 432 mm		
Weights	16 lb. bond to 80 lb. cover / 60 to 220 gsm		
Multiposition Stapling	50 sheets of 24 lb. bond / 90 gsm		
Hole Punch (Optional) North America: Europe:	2-3 Hole Punch 2-4 Hole Punch		
Booklet Maker for Office Finisher LX (Score/Crease, Saddle-stitch Staple) (Optional) (Requires 1 of the above paper handling options 2, 3 or 4)			
Capacity³	40 booklets (2-15 sheets per booklet – 20 lb. / 80 gsm or less)		
Sizes	Letter – 8.5 x 11 in. / A4 SEF Legal – 8.5 x 14 in. / B4 SEF Ledger – 11 x 17 in. / A3 SEF		
Saddle-stitch Stapling	2-15 sheets / 8-60 page booklet 16 lb. bond to 24 lb. bond / 60 to 90 gsm		
Score / Crease	1-15 sheets / unstapled		
Convenience Stapler (Optional – Includes Work Surface)			
Capacity³	50-sheet stapling 5,000 staples Requires a separate outlet		
Copy			
Document Scanner	110-sheet Duplex Automatic Document Feeder (DADF)		
Document Scanner Size	Platen: Up to 13.1 x 17.2 in. / 332.0 x 437 mm DADF: Up to 11.7 x 17 in. / 297 x 431.8 mm		
Simplex Copy Speed	Up to 25 cpm (copies per minute) 8.5 x 11 in. Up to 25 cpm A4 (210 x 297 mm)	Up to 30 cpm (copies per minute) 8.5 x 11 in. Up to 30 cpm A4 (210 x 297 mm)	Up to 35 cpm (copies per minute) 8.5 x 11 in. Up to 35 cpm A4 (210 x 297 mm)
Duplex Copy Speed	Up to 20 cpm (copies per minute) 8.5 x 11 in. Up to 20 cpm A4 (210 x 297 mm)	Up to 20 cpm (copies per minute) 8.5 x 11 in. Up to 20 cpm A4 (210 x 297 mm)	Up to 20 cpm (copies per minute) 8.5 x 11 in. Up to 20 cpm A4 (210 x 297 mm)
First-copy-out Time	As fast as 6.8 seconds	As fast as 5.4 seconds	As fast as 5.4 seconds
Sides (input:output)	1:1, 1:2, 2:2 and 2:1		
Quantity	1 to 999		
Resolution (max.)	Up to 600 x 600 dpi		

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

Reduction / Enlargement	Variable zoom from 25 % to 400 % in 1 % increments		
Concurrency	Concurrent scanning and printing		
Copy Features	Automatic Background Suppression Book Copying with Centre Erase Collation Darkness Control Edge Erase ID Card Copy N-up Reduce / Enlarge 25 % to 400 % Image Shift Original Type Sample Copy Sharpness		
Print			
First-print-out Time	As fast as 10.4 seconds	As fast as 9.1 seconds	As fast as 9.1 seconds
Print Resolution	Up to 1200 x 1200 dpi		
Page Description Languages	PCL® 5e, 6 PDF XPS TIFF JPEG HP-GL Adobe® PostScript® 3™ (Optional)		
Maximum Print Area	4 mm from lead edge of paper, 2 mm from Side and Trail edges of paper		
Print Features	Application Defaults Bi-directional Real-time Status Booklet Creation Draft Mode Job Identification Job Monitoring Personal Print Print from USB Sample Set Saved Job Scaling Secure Print Skip Blank Pages Store and Recall Driver Settings Two-sided Printing (as default) Xerox® Earth Smart Driver Settings		
Print from USB	Allows walk-up printing from Type A USB port Supports direct printing from computer via Type B USB port Supported file formats: PDF, JPEG, TIFF, XPS		
Operating Systems	Windows®, 7, 8, 10, Server 2000, Server 2003, Server 2008, Server 2008 R2 Server 2012 Mac OS® version 10.10, 10.11, & 10.12 Citrix Redhat® Enterprise Linux® IBM® AIX® 7.2 HP-UX® 11iv3 Oracle® Solaris 11.3 Fedora Core 24 SUSE® 13.2		
Network Protocols	TCP/IP: HTTP/HTTPS, Internet Printing Protocol, LPR/LPD, Raw Socket Printing/Port 9100, IPv4/IPv6, WSD LDAP Bonjour® / AirPrint™ FTP Most protocols not in use can be disabled		
Administrative Protocols	DHCP, SNMP, WINS, HTTP, HTTPS, TLS, SNTP, MDNS		
Fonts	PostScript fonts: 136 PCL fonts: 83		

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

Mobile Solutions and Mobile Device Apps	
Xerox® Mobile Express Driver®	Makes it easy for mobile users to find, use and manage Xerox® and non-Xerox® devices in every new location. Plug into a new network, and Mobile Express Driver automatically discovers available printers and provides status and capability information. Save a list of “favourite” printers for each location, store application print settings for use on any printer in any network, and greatly reduce mobile support calls to IT.
Xerox® Global Print Driver®	A truly universal print driver that lets IT administrators install, upgrade and manage Xerox® and non-Xerox® devices from a single driver. It provides a consistent, easy-to-use interface for end-users, reducing the number of support calls, and simplifying print services management.
Apple® AirPrint®	Print email, photos and important office documents directly from an Apple iPhone® or iPad® with no drivers to install and no cables to connect. With AirPrint, an iPhone or iPad automatically locates and connects to the AirPrint-enabled device over the office Wi-Fi network.
Google Cloud Print™	Google Cloud Print connects print devices to the web, enabling users to print the applications they use every day from smartphones, tablets, Chromebook™ notebook computers and any other web-connected device.
Xerox® Print Service Plug-in for Android™ (Free at Google Play™ Store)	The Xerox® Print Service Plug-in for Android KitKat (4.4 or greater) devices streamlines mobile printing without third-party apps or additional print drivers. You can easily print photos, Web pages and documents when your mobile device is connected to multifunction printers using a wireless network. A robust print option set includes two-sided printing, stapling and secure code release. A free download is available from the Google Play™ store.
Xerox® Mobile Link App (Free at Google Play™ Store and Apple® App Store)	The Xerox® Mobile Link App allows you to scan, email and fax from your phone or tablet by connecting with our multifunction printers and send data to and print data from cloud storage. It is easy to create Mobile Link One-Touch Workflows between a mobile device and a multifunction printer. Using a manual address or QR code identification for pairing, automatic device discovery makes it easy to find and pair a mobile device with a nearby Xerox® multifunction printer.
Xerox® Print Management and Mobility Suite, Xerox® Print Management and Mobility Service	Xerox® Print Management and Mobility Suite is a modular set of workflows designed to save customers time and money by providing effective control over their print fleet, while enabling worker productivity and mobility through a set of robust workflows. Xerox enables ultimate customer flexibility by offering these capabilities in both an on-premises server version and with a cloud based-version of this solution.
Scan	
Capability	Black and white and colour scanning
Concurrency	Scan while the system is printing copy or network print jobs, or while it is transferring scan to network or fax jobs
Simplex Input Speed	Black and white: Scan up to 55 ipm – 8.5 x 11 in. / A4 (210 x 297 mm) Colour: Scan up to 55 ipm – 8.5 x 11 in. / 55 ipm A4 (210 x 297 mm)
Duplex Input Speed	Black and white: Scan up to 26 ipm – 8.5 x 11 in. / A4 (210 x 297 mm) Colour: Scan up to 26 ipm – 8.5 x 11 in. / 26 ipm A4 (210 x 297 mm)
Resolution	Optical – 600 x 600 dpi
Bit Depth	24-bit colour / 8-bit grayscale
Maximum Scan Area	Platen: Up to 13.1 x 17.2 in. / 332 x 437 mm Document Feeder: 11.7 x 17 in. / 297 x 431.8 mm
Network Filing Protocols	FTP SMTP SMB
File Formats	JPG TIFF (single and multi-page) XPS (single and multi-page) PDF (single and multi-page) Searchable PDF Password-protected PDF Linearised PDF (set via embedded web server) and PDF/A
Scan Driver Compatibility (Network Only)	WIA TWAIN
Supported Scan Destinations	Scan to Home Scan to USB Scan to Email Scan to Network (Browse FTP or Browse SMB)

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

Network Scanning – Software Solutions	
Xerox® ConnectKey® Apps (Found at the Xerox® App Gallery)	Increase user productivity by simplifying and shortening everyday tasks. Unlike traditional software, ConnectKey Apps do not require a dedicated server, PC or IT resource. Instead, simply download these lightweight, serverless ConnectKey Apps to the ConnectKey-enabled multifunction printer.
Security	
Standard Security Features	Firmware Verification Security Certificate Management Automatic Self-Signed Certificate Creation Certificate Revocation List (CRL)/Online Certificate Status Protocol (OCSP) Certificate Path Validation Immediate Disk Overwrite (optional HDD on Desktop model) AES 256-bit Encryption FIPS 140-2 TLS/SSL SNMPv3 Smart Card Enablement (CAC/PIV/.NET) Detection of external programme falsification (XCP Plug-in) Network Authentication Access Controls Role Based Permissions Domain Filtering IP Address Filtering Port Filtering Audit Log Secure Email Secure Fax Secure Print Secure Scan
PSTN One-line or Three-line Fax (optional)	
Fax ⁵	
Fax Speed	33.6 Kbps
Resolution	Up to 600 x 600 dpi resolution
Compression	MH, MR, MMR, JBIG
Fax Features	Walk-up Fax, includes LAN Fax, Direct Fax, Fax Forward to Email Fax dialing via Unified Address Book (up to 2,000 contacts)
Fax over IP (optional)	
Compliance	T.38 compliant IP / SIP
Resolution	Up to 600 x 600 dpi resolution
Compression	MH, MR, MMR, JBIG
Fax Features	Walk-up Fax, includes LAN Fax, Direct Fax, Fax Forward to Email Fax dialing via Unified Address Book (up to 2,000 contacts)
Device Management	
Xerox® CentreWare® Web	
	<ul style="list-style-type: none"> • A Web-based server application for network administrators that permits web browser-based device management from any workstation, whether running Windows or UNIX or any other operating system • Works with any SNMP-managed printer from any manufacturer • Provides help with device discovery and installations, health checks and troubleshooting, and device upgrades, as well as basic accounting and asset management
Xerox® Embedded Web Server – Integrated Device Web Page	
Device Status	<ul style="list-style-type: none"> • Tray status/contents • Consumables status • Billing/Usage • Quick Links
Print Queue Viewing	Job print queue management—View and delete
Job Submission	Print-ready files (PS, PCL, PDF, XPS, JPEG)

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

Device Administration	Allows simple, remote installation setting of configuration options and management of the device	
Browsers	Microsoft® Internet Explorer® 11 Microsoft Edge™ 38 Mozilla™ Firefox® 48 Apple® Safari® 9.1 Google Chrome™ 52	
Remote Services		
Xerox® Meter Assistant® Service	Automates the process of collecting and submitting meter reads for tracking and billing of Xerox® device usage. Eliminates the need for time-consuming end-user involvement and ensures that meter reads are submitted to Xerox on time.	
Xerox® Supplies Assistant® Service	Automatically orders supplies for Xerox® output devices based on actual usage, eliminating the need to manually manage supplies inventory.	
MaintenanceAssistant	Offers a fast (and free) way to resolve potential issues and receive assistance and automate the troubleshooting/repair process. Diagnostic data is sent to Xerox, allowing for problems to be solved faster with increased uptime.	
Accounting		
Xerox® Standard Accounting (Standard)		
Tracking	Copy, Print, Fax, Scan and Email usage	
Accounting	Up to 30,000 User Accounts with HDD installed, 1,000 User Accounts without HDD installed	
Features	Administrator can manage the feature via the Embedded Web Server or local user interface on device	
Accounting Options – Network Accounting Enablement (Standard) (Allows central server to manage all accounting)		
Accounting	Network Accounting Enablement (Job Based Accounting) Up to 9,999 User IDs; Up to 9,999 Account IDs with HDD Up to 1,000 User IDs; Up to 1,000 Account IDs without HDD Up to 14,000 accounting records (transactions)	
	<ul style="list-style-type: none"> Enhanced network accounting with up to the minute data on how the system is being used Comprehensive management and enterprise scale tracking and reporting of device usage of copy, print, scan and server fax Numerous solutions are available through Xerox Alliance Partners. For details visit www.xerox.com Security enhancements with the addition of HTTPS protocol support Device requests account authentication from third party server enabling larger databases of users and accounts Accept Authentication Login at control panel and pass to third party Networking Account Interface with third party accounting terminal for accounting user interface 	
Supplies and Accessories	Quantity	Part Number
Supplies		
Standard Capacity Print Cartridges	15,500 standard pages ⁶	106R03395
High Capacity Print Cartridges	31,000 standard pages ⁶	106R03396
Worldwide Metered Print Cartridge	30,000 standard pages ⁶	106R03392
Black Drum Cartridge	80,000 pages ⁷	113R00779
LX Booklet Maker Cartridge (8 cartridges per carton)	16,000 staples	008R12897
Staple Refills for Finishers (3 cartridges per carton)	15,000 staples	008R12941
Staple Cartridge for Finishers (1 cartridge per carton)	5,000 staples	008R12964

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

Accessories / Options	
Single Tray Module (does not include stand – for Base Model only)	097S04910
Single Tray with Stand Module	097S04907
Three Tray Module	097S04908
High-Capacity Tandem Tray Module	097S04909
Envelope Tray (This replaces Tray 1)	497K17720
Centre Output Tray (Dual Catch Tray)	497K17800
HDD (320 GB Hard Drive)	497K17740
1 Line Fax Kit (PSTN Fax) (Europe and South Africa)	497K17770
3 Line Fax Kit (PSTN Fax) (Europe and South Africa)	497K17780
1 Line Fax Kit (PSTN Fax) (India, Brazil and Argentina)	497K17790
Wireless Network Adapter Kit	497K16750
Internal Card Reader / RFID Kit	497K18120 (WH) 497K18140 (EH)
PostScript Kit	497K17810
Fax Over IP Kit	497K17820

¹ Maximum volume capacity expected in any one month. Not expected to be sustained on a regular basis.

² Expected regular monthly throughput.

³ Paper capacities are based on 20 lb. / 75 gsm stock; capacities will vary with different weight stocks.

⁴ Power states defined per ENERGY STAR® Programme requirements for Imaging Equipment.

⁵ Requires analogue phone line.

⁶ Average standard pages. Declared Yield in accordance with ISO/IEC19752. Yield will vary based on image, area coverage and print mode.

⁷ Approximate pages. Declared yield will vary depending on job run length and media size/orientation and machine speed.

Return spent imaging supplies through the Xerox Green World Alliance collection/reuse/recycling programme. For more information, visit www.xerox.com/about-xerox/recycling.

For more information, visit us at www.xerox.com/office

Configurations vary by geography.